

# Lei 400 my2012

LEI 400 my2012, automatic vending machine for hot and cold drinks with 400 cup capacity and 13 selection buttons of which 3 pre-selections for sugar dosage and decaffeinated.

Equipped with: light for the upper panel, anti-vandal or standard coin introduction and water filter head assembled as standard. For making maintenance operations easier, the boiler group is easily reachable and 2 mixers are extractable of which one is standard for milk and chocolate and one is heated for instant coffee. Standard serpentine kit for tea on all versions.

Cup dispenser adaptable to various diameters and spoon dispenser adjustable from 90 to 105 mm.

Door lock with programmable code.

Switching power supply that guarantees total stability of the instant product dose and complete electric safety protections. Standard multi-protocol electronics.

LEI 400 my2012 can work in master/slave together with BVM 676, refrigerated automatic spiral vending machine for the sale of snacks, cans and bottles, increasing selling opportunities and quality of the service given to customers.


## Lei 400 my2012 technical features




LEI 400 MY2012



VISTA M & LEI 400 MY2012

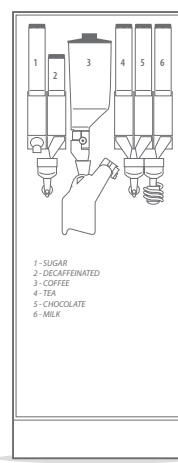

LEI 400 MY2012 ESPRESSO 5 CANISTERS

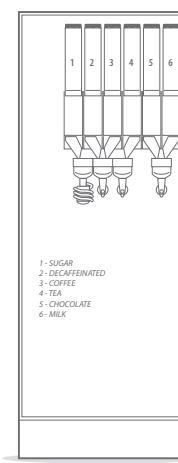

LEI 400 MY2012 INSTANT 6 CANISTERS

VERSIONS LEI 400 MY2012	E4S SINGLE BOILER ANTI-VANDAL COIN INTRODUCTION ESPRESSO	I6S ANTI-VANDAL COIN INTRODUCTION INSTANT	E4S STANDARD COIN INTRODUCTION ESPRESSO	I6S STANDARD COIN INTRODUCTION INSTANT
COFFEE BEANS	1	-	1	1
SUGAR CANISTER	1	-	1	1
INSTANT CANISTERS	4	6	4	4
DIMENSIONS	H 1630 mm x W 620 mm x D 770 mm WEIGHT 132,5 kg			

### TECHNOLOGY



### CHARACTERISTICS

#### ELECTRICAL SUPPLY

230 Vac – 50Hz / 120 Vac – 60 Hz

#### INTERNAL ELECTRICAL SUPPLY

All the electrical components are supplied at 24 Vdc, with the exception of the boiler resistances, the pump and the steam ventilator that are at 230 Vac – 50 Hz o 120 Vac – 60 Hz

#### POWER SUPPLY

1.80 kW single boiler espresso version

2.20 kW instant version

#### WATER SUPPLY

Fitting connection = 3/4"

Water pressure = 0.5 – 6.5 bar

### PRODUCT CAPACITY

Coffee beans	2.50 kg *
Instant coffee	1.00 kg
Barley	1.25 kg
Powder milk	1.70 kg
Whitener	3.20 kg
Chocolate	3.60 kg
Lemon tea	3.30 kg
Tea	1.70 kg
Soup	3.60 kg
Sugar	4.00 kg
Spoons	400 pz
Cups	400 pz

\* with extension kit 3.80 kg

› **USER INTERFACE** Selection panel with 13 visible and intuitive push buttons of which 10 are direct selections, 1 pre-selection (that can be configured as selection) and 2 push buttons for sugar dosage. End selection acoustic signal to render the use of the vending machine simple and immediate. Ergonomic commands that can be used by minors and disabled people. 32 digit graphic LCD display.

› **ACCESSORIES** Cup sensor. Water softener that guarantees the respect of the HACCP standards and prevents lime scale build up. RS232 module. Visual Smart Programmer Speed that allows the upload of the firmware and settings and the download of the settings and audit data without a PC. Telemetry kit (GPRS modem with antenna + clock chip). Key kits for configuration settings, telemetry and audit data. Chip card kit. Electronics presetted for telemetry, clock chip, EXE/MDB board and all the programming system. Additional canister and mixer to reach 7 canisters configuration in the instant version.

**Bianchi Vending in Italy** • Headquarters • info@bianchivending.com

Corso Africa 9, 24040 Zingonia di Verdellino, Bergamo, Italia

tel. +39.035.45.02.111, fax +39.035.883.304

**vending**  
bianchivending.com



Specifications and technical information given are indicative and may be subject to change without prior notice. ZDLEI600 MY2012\_ED05/2012/IT

# Lei 600 my2012

LEI 600 my2012, automatic vending machine for hot and cold drinks with 600 cup capacity and 15 selection buttons out of which 3 pre-selections (2 for sugar setting + 1 for decaffeinated in the standard version).

Equipped with: light for upper panel, anti-vandal coin introduction and water filter head assembled as standard.

To make maintenance operations easier, the boiler group is easily accessible and 2 mixing bowls (one is standard for milk and chocolate and one is heated for instant coffee) can be easily removed. Standard serpentine kit for tea on all versions.

Cup dispenser adjustable to various diameters (from 70 to 74 mm) and dispenser for 90 or 105 mm stirrers.

Door lock with programmable code.

Switching power supply guarantees total stability of doses when delivering powders and complete electric safety protections.

Standard multi-protocol electronics.

LEI 600 my2012, can work in master/slave, with only one set of payment systems on the hot vending machine, together with a refrigerated automatic spiral vending machine for the sale of snacks, cans and bottles, increasing selling opportunities and the quality of the service given to customers.


## Lei 600 my2012 technical features




LEI 600 MY2012



LEI 600 MY2012 + VISTA L

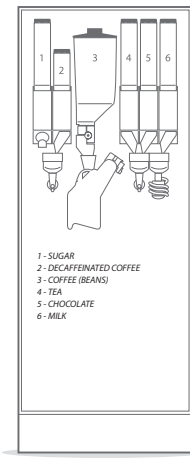

LEI 600 MY2012 ESPRESSO 5 CANISTERS

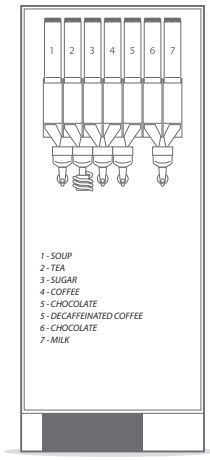

LEI 600 MY2012 INSTANT 7 CANISTERS

VERSIONS LEI 600 MY2012	E4S ANTI-VANDAL COIN INTRODUCTION ESPRESSO	I7S ANTI-VANDAL COIN INTRODUCTION INSTANT	E4S ANTI-VANDAL COIN INTRODUCTION STANDARD	I7S ANTI-VANDAL COIN INTRODUCTION STANDARD
COFFEE BEANS	1	-	1	1
CANISTER FOR SUGAR	1	-	1	1
CANISTER FOR POWDER INGREDIENTS	4	7	4	4
<b>DIMENSIONS</b>	H 1830 mm x L 607 mm x P 770 mm, WEIGHT 140 kg			

### TECHNOLOGY



### CHARACTERISTICS

#### ELECTRICAL SUPPLY

230 Vac – 50Hz / 120 Vac – 60 Hz

#### INTERNAL ELECTRICAL SUPPLY

All the electrical components are supplied at 24 Vdc, with the exception of the boiler resistances, the pump and the steam ventilator that are at 230 Vac – 50 Hz o 120 Vac – 60 Hz

#### POWER SUPPLY

1.80 kW single boiler espresso version

2.20 kW instant version

#### WATER SUPPLY

Fitting connection = 3/4"

Water pressure = 0.5 – 6.5 bar

### INGREDIENT CAPACITY

Coffee beans	3.80 kg *
Decaffeinated coffee	1.40 kg
Barley	1.50 kg
Milk	2.20 kg
Creamer	4.00 kg
Chocolate	4.80 kg
Lemon tea	5.20 kg
Natural tea	2.40 kg
Soup	3.80 kg
Sugar	5.20 kg
Stirrer	600 pz
Cups	600 pz (can be increased up to 700)

\* fitting an extension can catch up with 4.50 kg

► **USER INTERFACE** Selection panel with 15 visible and intuitive push-buttons out of which 12 are direct selections, 1 pre-selection (that can be configured as selection) and 2 push-buttons for sugar dosage. End selection acoustic signal to make the use of the vending machine simple and immediate. 32 digit graphic LCD display.

► **ACCESSORIES** Cup sensor. Water softener that guarantees the respect of the HACCP standards and prevents lime scale build up. RS232 module. Visual Smart Programmer Speed that allows the upload of the firmware and settings and the download of the settings and audit data without a PC. Telemetry kit (GPRS modem with antenna + clock chip). Key kits for configuration settings, telemetry and audit data. Chip card kit. Electronics pre-set for telemetry, clock chip, EXE/MDB board and all the programming system.

**Bianchi Vending in Italy** • Headquarters • info@bianchivending.com

Corso Africa 9, 24040 Zingonia di Verdellino, Bergamo, Italia

tel. +39.035.45.02.111, fax +39.035.883.304

**vending**  
bianchivending.com